

## City of Dothan 1,500 Gallon Grease Interceptor

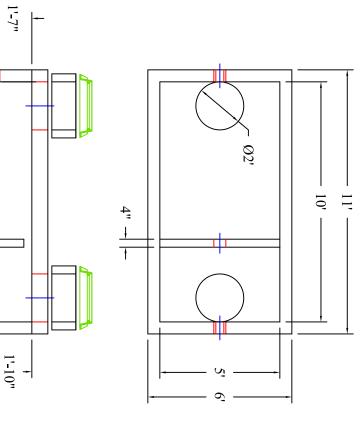

-MONTH/YEAR -CAPACITY -INLET/OUTLET LABEL TANK WITH:

\*EXTERIOR COATED



5'-5"

4'-8"

2'-1"

5'-2"







WWW.BARTOWPRECAST.COM sales@bartowprecast.com 770.382.4462

MODEL: 110-01520

1,500 GALLON GREASE INTERCEPTOR PRODUCT INFORMATION

TANK = 20,550 # LID = 6,150 # BAFFLE = 1,600 # DESIGN MAY VARY

MEETS ASTM C 1613 SPECIFICATIONS

RATING: HS-20-44, ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

CALL FOR ADDITIONAL SPECS



Revision: Date: Drawn By: Checked By: DRAWING INFORMATION CBC

7/27/16

APPROVED BY:

sign:

print:

\*actual dimensions may vary slightly