




**BARTOW
PRECAST**
 Cartersville, GA
 770/382-4462
 Fax: 770/382-4480

10000 Gallon Septic Tank
 Date: 10-12-04 Scale:
 Job:
 Wt. Vault = 52,100lbs. Lid = 25,600lbs.

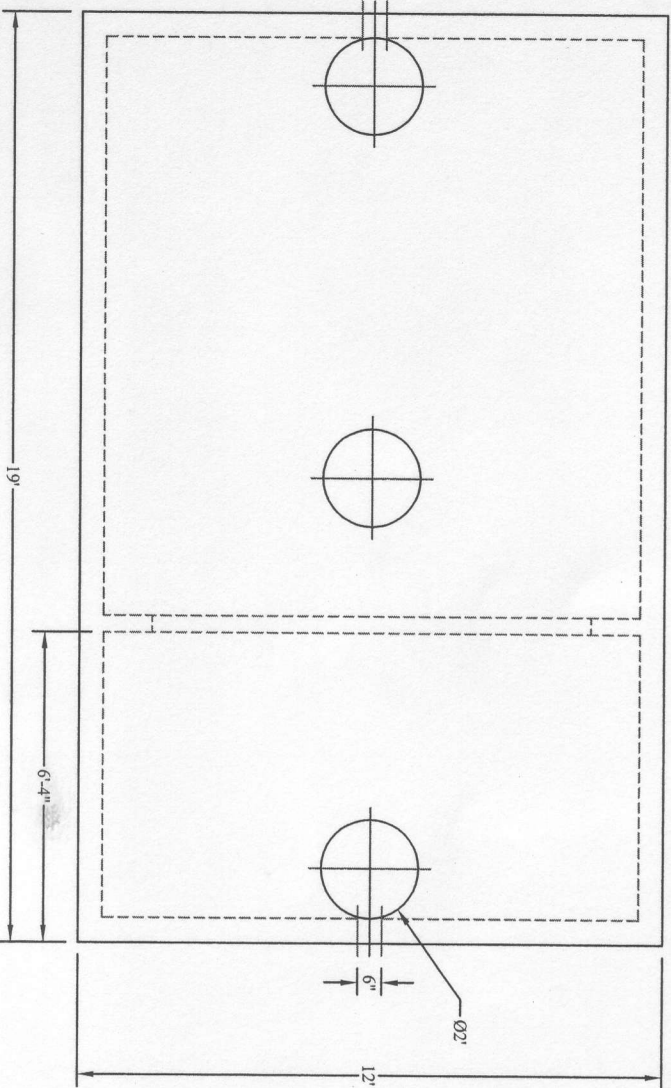

- Tank Specs:
- Concrete to be 5000 psi at 28 days.
 - Reinforcement to be #4 rebar (ASTM A-15) on 12" center.
 - Ship lap joint sealed with mastic (ASTM C-990)
 - Tank to be marked: BP 10000

Section 1: Ship Lap Detail

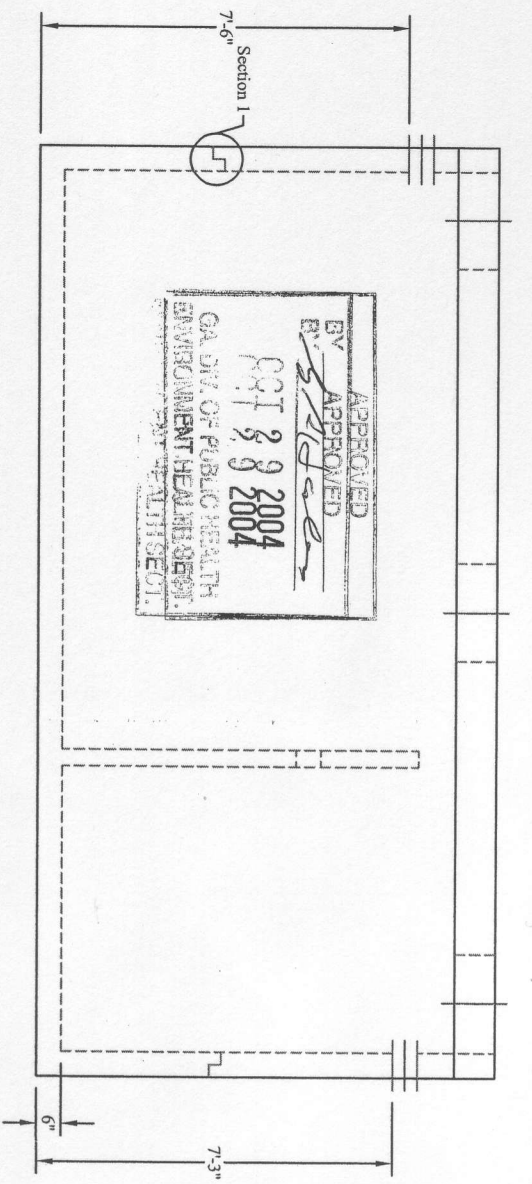

APPROVED
 BY: *[Signature]*
 RST 3 8 2004
 GA. DIV. OF PUBLIC HEALTH
 ENVIRONMENTAL HEALTH SECTION
 DIV. OF ENVIRONMENTAL HEALTH

