

BARTOW PRECAST

Cartersville, GA
770/382-4462
Fax: 770/382-4480



9500 Gallon Septic Tank

Date: 10-12-04

Scale:

Job:

Wt. Vault = 50,050lbs. Lid = 26,500lbs.

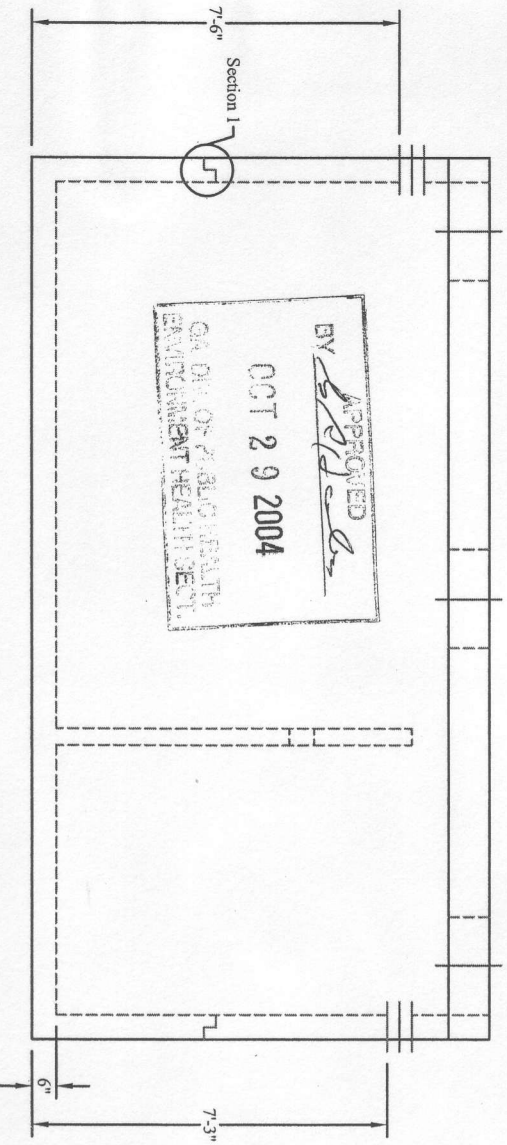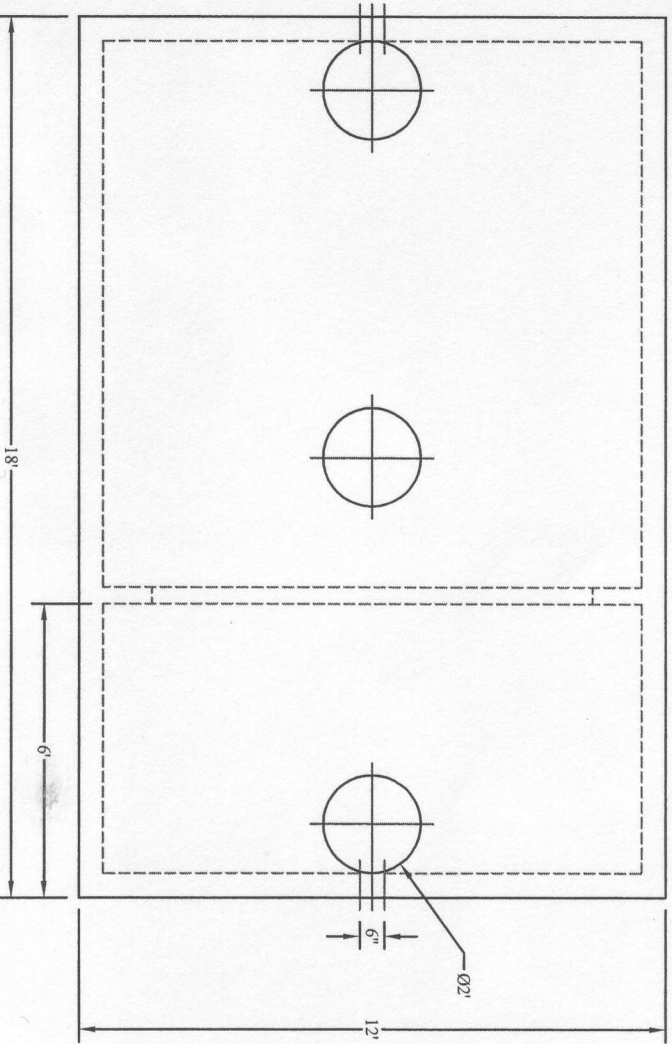

- Tank Specs:
- Concrete to be 5000 psi at 28 days.
 - Reinforcement to be #4 rebar (ASTM A-15) on 12" center.
 - Ship lap joint sealed with mastic (ASTM C-990)
 - Tank to be marked: BP 9500

Section 1: Ship Lap Detail

