


Augusta Utilities 2,000 Gallon Grease Interceptor





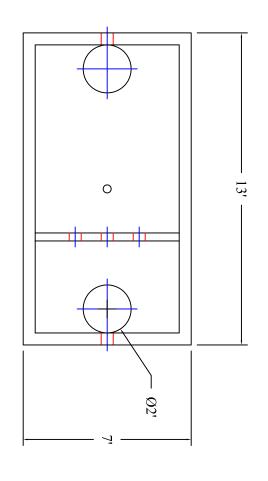

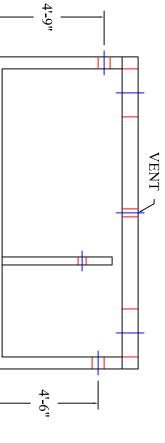



Scale: 1/4" = 1'

770.382.4462 sales@bartowprecast.com www.bartowprecast.com

MODEL: GI 2000/186

PRODUCT INFORMATION 2,000 GALLON GREASE INTERCEPTOR

TANK= 19,400 # LID= 8,500 # BAFFLE = 1,500 # DESIGN MAY VARY

SPECIFICATIONS MEETS ASTM C 1613

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS, INCLUDE POLYLOK PL 625 OUTLET FILTER

TANK COATED WITH CONSEAL CS-55, INTERIOR & EXTERIOR

BAFFLE CROSSOVERS TO BE 4" PVC SLEEVES



DRAWING INFORMATION

Drawn By: <u>CBC</u>
Checked By: _____
Revision: _____
Date: _____11/22/16

APPROVED BY:

sign:	print:	

*actual dimensions may vary slightly