


OIL SEPARATOR 1,500 GALLON CAPACITY





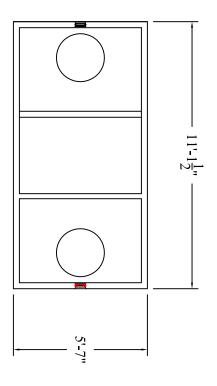

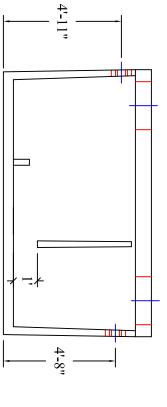





sales@bartowprecast.com 770.382.4462 WWW.BARTOWPRECAST.COM

MODEL: 112-01534

PRODUCT INFORMATION 1,500 GALLON OIL/WATER SEPARATOR

TANK = 12,300 # LID= 5,600 # DESIGN MAY VARY

SPECIFICATIONS MEETS ASTM C 933

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS

CALL FOR ADDITIONAL SPECS



DRAWING INFORMATION

Drawn By: Checked By:	JJG CBC
Checked By:	$_{ m JJG}$
Revision:	_
Date:	10/13/16
7466	10/10/10

APPROVED BY:

•	print:	

sign:

*actual dimensions may vary slightly