


## Augusta Utilities 1,500 Gallon Grease Interceptor





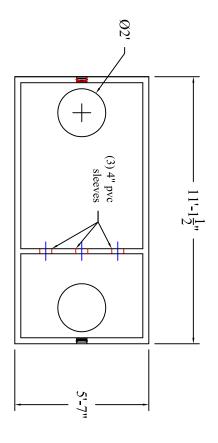

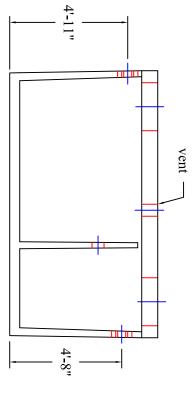





sales@bartowprecast.com WWW.BARTOWPRECAST.COM 770.382.4462

MODEL: 111-01537

1,500 GALLON GREASE INTERCEPTOR PRODUCT INFORMATION

TANK = 11,700 # LID= 5,600 # DESIGN MAY VARY

SPECIFICATIONS MEETS ASTM C 1613

RATING: A-16 (H-20), ASSUME 4' MAX EARTH COVER WITH 3' WATER TABLE BELOW GRADE

CONCRETE: 5,000 PSI @ 28 DAYS

STEEL REINFORCEMENT: MEETS ASTM A 615, PLACEMENT AS REQUIRED BY DESIGN

INLET & OUTLET BOOT MEETS ASTM C 923, ACCEPTS 4" & 6" PVC

BUTYL SEALANT: MEETS ASTM C 900, USED ON JOINTS

INTERNAL PIPING BY OTHERS PER MUNICIPAL SPECS, INCLUDE POLYLOK PL 625 OUTLET FILTER ACCESS OPENING SUITABLE FOR 24" RISER AND/OR RING & COVER

CROSSOVER TO BE (3) 4" PVC SLEEVES

TANK COATED WITH CONSEAL CS-55, INTERIOR & EXTERIOR



DRAWING INFORMATION

Date:	Revision:	Checked By:	Drawn By:
11/22/16	_		CBC

APPROVED BY:

sign:	print:	

\*actual dimensions may vary slightly